

system violett


A system designed for 24/7 operation and maximum output.

Configurable for a vast range of customer requirements.

Applications: Thermotransfer foils, dye-sublimation foils and other sensitive materials.

System: system violett has a twin-base design and is loaded from the back. This high-performance system is equipped with four servo drives, turrets and an automatic leader applicator. It can be adapted to a wide range of different modules and options all the way through to robotic functions under different production conditions.

Advantages: With shaftless unwinding and other features such as automatic tail winding, edge guiding, integrated trim winders and inbuilt safety, system violett guarantees extremely stable and user-friendly production.

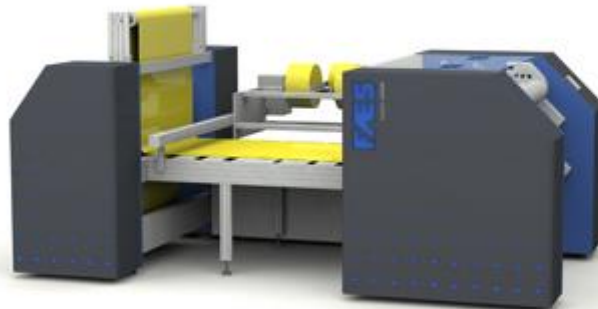

Specifications:

Unwinding	<ul style="list-style-type: none"> Roll width: 1000 or 1500 mm Roll diameter: 800 mm max. Core diameter: 6"
Slitting	<ul style="list-style-type: none"> Slitting widths: from 20 mm, with comb < 20 mm
Rewinding	<ul style="list-style-type: none"> Roll diameter: 150 mm max. Core diameter: from 1/2"
Main drive	<ul style="list-style-type: none"> Speed: 800 m/min max.